

Philips V Line 271V8L/00 LED display 68,6 cm (27") 1920 x 1080 Pixel Full HD Nero

Marchio : Philips

Famiglia del prodotto: V Line **Codice prodotto:** 271V8L/00

Nome del prodotto :
271V8L/00

Monitor 271V8L Monitor LCD

Philips V Line 271V8L/00 LED display 68,6 cm (27") 1920 x 1080 Pixel Full HD Nero:


Il monitor Philips V-Line con ampio angolo di visualizzazione offre una visione oltre ogni limite, una qualità elevata e funzioni essenziali. La sincronizzazione adattiva assicura una visualizzazione video fluida. Caratteristiche quali antiriflesso, modalità LowBlue e immagini prive di sfarfallio non affaticano gli occhi.

Philips V Line 271V8L/00. Dimensioni diagonale schermo: 68,6 cm (27"), Risoluzione del display: 1920 x 1080 Pixel, Tipologia HD: Full HD, Tecnologia display: LED, Superficie display: Opaco, Tempo di risposta: 4 ms, Rapporto d'aspetto nativo: 16:9, Angolo di visualizzazione (orizzontale): 178°, Angolo di visualizzazione (verticale): 178°. Montaggio standard VESA. Colore del prodotto: Nero



Display		Ergonomics		
Display diagonal *	68.6 cm (27")	On Screen Display (OSD) languages	Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Swedish, Turkish, Ukrainian	
Display resolution *	1920 x 1080 pixels		Number of OSD languages	21
HD type *	Full HD		Plug and Play	✓
Native aspect ratio *	16:9		LED indicators	Operation, Stand-by
Display technology *	LED	Power		
Panel type *	VA	Energy efficiency class (SDR) *	E	
Backlight type	W-LED	Energy consumption (SDR) per 1000 hours *	22 kWh	
Touchscreen *	✗	Power consumption (typical) *	23.3 W	
Display brightness (typical)	250 cd/m ²	Power consumption (standby) *	0.3 W	
Response time *	4 ms	Power consumption (off)	0.3 W	
Display surface	Matt	AC input voltage	100 - 240 V	
Anti-glare screen	✓	AC input frequency	50 - 60 Hz	
Screen shape *	Flat	Power supply type	Internal	
Aspect ratio	16:9	Energy efficiency scale	A to G	
Contrast ratio (typical) *	3000:1	European Product Registry for Energy Labelling (EPREL) code	400138	
Maximum refresh rate *	75 Hz	Operational conditions		
Viewing angle, horizontal	178°	Operating temperature (T-T)	0 - 40 °C	
Viewing angle, vertical	178°	Storage temperature (T-T)	-20 - 60 °C	
Display number of colours *	16.7 million colours	Operating relative humidity (H-H)	20 - 80%	
Pixel pitch	0.3114 x 0.3114 mm	Operating altitude	0 - 3658 m	
Pixel density	82 ppi	Non-operating altitude	0 - 12192 m	
Horizontal scan range	30 - 85 kHz	Weight & dimensions		
Vertical scan range	48 - 75 kHz	Width (with stand)	613 mm	
Viewable size, horizontal	59.8 cm	Depth (with stand)	231 mm	
Viewable size, vertical	33.6 cm	Height (with stand)	456 mm	
Digital horizontal frequency	30 - 85 kHz	Weight (with stand)	3.94 kg	
Digital vertical frequency	48 - 75 kHz			
Display diagonal (metric)	68.6 cm			
DDC/CI	✓			
Haze rate	25%			
Surface hardness	3H			
Display sRGB	✓			

Performance		Weight & dimensions	
NVIDIA G-SYNC *	✗	Width (without stand)	613 mm
AMD FreeSync *	✗	Depth (without stand)	45 mm
VESA Adaptive Sync support	✓	Height (without stand)	363 mm
Component video sync	Separate sync, Sync-on-green (SOG)	Weight (without stand)	3.48 kg
Flicker-free technology	✓	Packaging data	
Low Blue Light technology	✓	Package width	730 mm
Multimedia		Package depth	123 mm
Built-in speaker(s) *	✗	Package height	446 mm
Built-in camera *	✗	Package weight	5.53 kg
Design		Package type	Box
Market positioning *	Home	Packaging content	
Product colour *	Black	Stand included	✓
Ports & interfaces		Cables included	HDMI, AC
Built-in USB hub *	✗	Manual	✓
VGA (D-Sub) ports quantity	1	Sustainability	
DVI port	✗	Doesn't contain	Mercury, PVC/BFR
HDMI *	✓	Other features	
HDMI ports quantity	1	Exterior finish type	Textured
Audio output	✓	Picture enhancement	SmartImage
Ergonomics		Recyclable packaging material	100%
VESA mounting *	✓	Regulatory Approvals	UKRAINIAN; CB; TUV Ergo; TUV/GS; CU-EAC; EAEU RoHS; CE Mark
Panel mounting interface	100 x 100 mm	Heavy metals free	Hg (mercury), Pb (lead)
Cable lock slot *	✓	EasyRead mode	✓
Cable lock slot type	Kensington	LowBlue mode	✓
Height adjustment *	✗	Compliance certificates	RoHS
Tilt adjustment	✓	Mean time between failures (MTBF)	50000 h
Tilt angle range	-5 - 20°	Certification	UKRAINIAN, CB, TUV Ergo, TUV/GS, CU-EAC, EAEU RoHS, CE Mark
On Screen Display (OSD)	✓	Logistics data	
		Harmonized System (HS) code	85285210

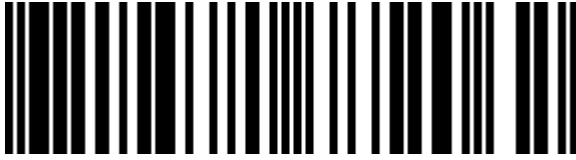

8712581772062

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 18-DEC-2024. Prints or copies of Information are only valid on the printed Publication date