EZVIZ H8c PoE 2K Cupola Telecamera di sicurezza IP Esterno 2304 x 1296 Pixel Soffitto/muro

Marchio : EZVIZ

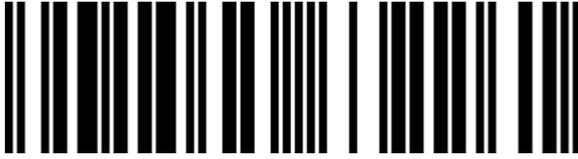**Nome del prodotto :** H8c PoE 2K

Codice prodotto: CS-H8C POE (2K) 4MM

EZVIZ H8c PoE 2K. Tipo: Telecamera di sicurezza IP, Posizionamento supportato: Esterno, Tecnologia di connessione: Cablato. Tipo di montaggio: Soffitto/muro, Colore del prodotto: Bianco, Fattore di forma: Cupola. Angolo di visione dell'obiettivo, orizzontale: 89°, Angolo di visione dell'obiettivo, verticale: 46°, Angolo di visione dell'obiettivo, diagonale: 104°. Tipo sensore: CMOS, Dimensioni sensore ottico: 25,4 / 2,8 mm (1 / 2.8"). Lunghezza focale fissa: 4 mm

Performance

Type *	IP security camera
Placement supported *	Outdoor
Connectivity technology *	Wired
Auto-tracking	✔
Wide Dynamic Range (WDR)	✔
Day/night mode	✔
Infrared (IR) cut-off filter	✔
Built-in light	✔

Design

Form factor *	Dome
Mounting type *	Ceiling/wall
Product colour *	White
Weatherproof	✔

Camera

Minimum illumination	0 lx
Lens viewing angle, horizontal	89°
Lens viewing angle, vertical	46°
Lens viewing angle, diagonal	104°
Tilt angle range	0 - 80°
Pan range	0 - 350°

Image sensor

Number of sensors	1
Optical sensor size	25.4 / 2.8 mm (1 / 2.8")
Progressive scan	✔
Sensor type *	CMOS

Network

Wi-Fi *	✘
Bluetooth *	✘

Storage

Built-in HDD *	✘
Compatible memory cards	MicroSD (TransFlash)
Maximum memory card size	512 GB

Ports & interfaces

Ethernet LAN (RJ-45) ports	1
DC-in jack	✔

Security

Password protection	✔
Video motion detection	✔
Intelligent Video Surveillance (IVS) system features	Human detection
Anti-flicker	✔
Heartbeat	✔
Digital watermark	✔
Configurable region	✔

Management features

Cloud services supported	EZVIZ Cloud

Power

Power source type *	DC, PoE
Power consumption (max)	12 W
DC output voltage	12
DC output current	1 A

Lens system

Number of lenses *	1
Maximum aperture number	1.6
Fixed focal length	4 mm

Night vision

Night vision *	✔
Night vision distance	30 m
B/W night vision distance	30 m
LED type	IR/White

Video

Maximum resolution *	2304 x 1296 pixels
Video formats supported	H.264, H.265
Video compression formats	H.264, H.265
Frame rate	30 fps
Video streaming	✔
Noise reduction	✔
Noise reduction technology	3D noise reduction
Digital Wide Dynamic Range (DWDR)	✔

Audio

Built-in speaker(s)	✔
Audio system	2-way
Built-in microphone	✔

Network

Ethernet LAN *	✔
Ethernet interface type	Fast Ethernet

Operational conditions

Operating temperature (T-T)	-30 - 50 °C
Operating relative humidity (H-H)	0 - 95%

Weight & dimensions

Width	100 mm
Depth	140 mm
Height	136 mm
Weight	525 g

Packaging data

Package width	140 mm
Package depth	140 mm
Package height	192 mm
Package weight	745 g

Sustainability

Sustainability compliance	✔
Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA, WEEE

Packaging content

Number of cameras *	1
Screws included	✔
Drilling template included	✔
Manual	✔
AC adapter included	✔
Quick start guide	✔
Waterproof connector	✔

Technical details

Lens mount interface	M12

6941545632261