tp-link

TP-Link Switch 16-porte Gigabit Rack Unmanaged

Marchio : TP-Link

Nome del prodotto : Switch 16-porte Gigabit Rack Unmanaged

Codice prodotto: TL-SG1016 V12

TL-SG1016 - 32Mbit/s, DHCP, SSH/SSL
TP-Link Switch 16-porte Gigabit Rack Unmanaged. Tipo interruttore: Non gestito. Tipo di porte RJ-45: Gigabit Ethernet (10/100/1000), Quantità di porte RJ-45: 16. Full duplex. Dimensioni tavola MAC: 8000 voci, Capacità di commutazione: 32 Gbit/s. Standard di rete: IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Connettore di alimentazione: Jack di ingresso AC. Montaggio rack, Fattore di forma: 1U

Management features	
Switch type *	Unmanaged
Quality of Service (QoS) support	✔
User operation log	✔

Ports & interfaces	
Basic switching RJ-45 Ethernet ports quantity *	16
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)
Gigabit Ethernet (copper) ports quantity	16
Power connector	AC-in jack

Network	
Networking standards *	IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x
10G support *	✖
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T
Cable types supported	Cat3, Cat4, Cat5, Cat5e
Full duplex	✔
Half duplex	✔
Flow control support	✔
Auto MDI/MDI-X	✔
Auto-negotiation	✔

Data transmission	
Switching capacity *	32 Gbit/s
Forwarding rate	23.8 Mpps
MAC address table *	8000 entries
Store-and-forward	✔
Jumbo frames support	✔
Jumbo frames	10000

Design	
Rack mounting *	✔

Performance	
Compatible operating systems	Microsoft Windows 2000/XP/2003/Vista/2008/7/2012/8/10 MacOS NetWare UNIX Linux
Maximum cable length	100 m
Fanless	✔

Power	
Power source *	AC
Power supply included *	✔
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power consumption (max)	10.44 W

Power over Ethernet (PoE)	
Power over Ethernet (PoE) *	✖

Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%
Heat dissipation	35.6 BTU/h

Weight & dimensions	
Width	440 mm
Depth	180 mm
Height	44 mm

Packaging content	
Cables included	AC
User guide	✔
Rack mount kit	✔

Packaging data	
Package type	Box
Package width	250 mm
Package depth	528 mm

Design

Form factor	1U
Product colour	Black
Housing material	Metal
LED indicators	✔

Packaging data

Package height	80 mm
Package weight	2.04 kg

Sustainability

Sustainability compliance	✔

Certificates

Compliance certificates	CE, Federal Communications Commission (FCC), RoHS

Logistics data

Harmonized System (HS) code	85176990

6935364081263

5052217234896

0845973020095

845973020095
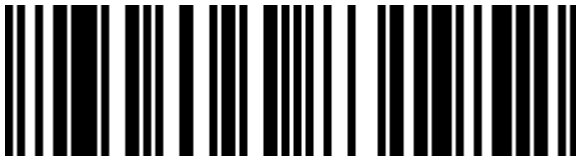
0230494831952

230494831952

6315487614096
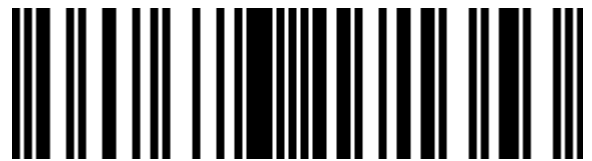
3548383171353

6935364020095

8459730200952
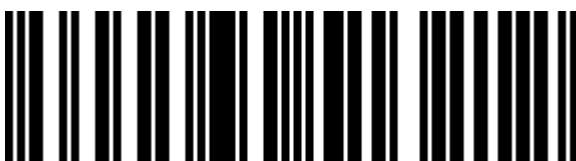
0544564513212

544564513212
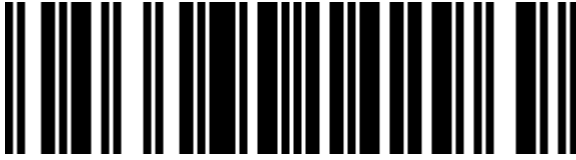
5053460142969

5053106224714
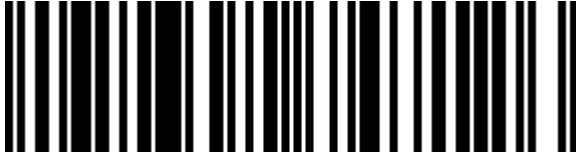
0172302747126

172302747126

0854432534257

854432534257

0191120080758

191120080758

0168141531767

168141531767

4056203090887

2165327000466